
Chip Ferrite Bead High Current Type
Size 0805




- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 4000pcs

- Data lines and low power lines
- Connec on between digital and analog circuit

Dimensions: [mm]

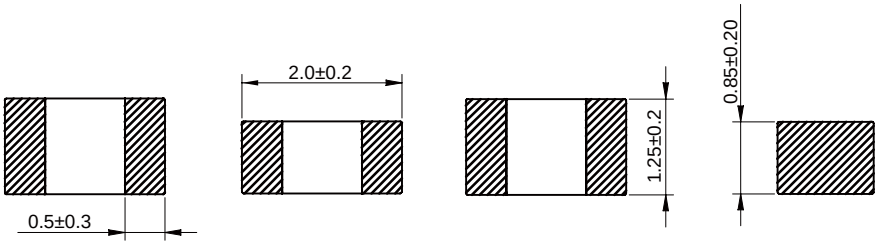

Land Pattern: [mm]



Electrical Properties:

FBHE0805-300-302R	30±25%	100	0.04	3000
FBHE0805-300-602R	30±25%	100	0.01	6000
FBHE0805-600-402R	60±25%	100	0.03	4000
FBHE0805-800-302R	80±25%	100	0.04	3000
FBHE0805-121-202R	120±25%	100	0.01	2000
FBHE0805-121-402R	120±25%	100	0.02	4000
FBHE0805-151-202R	150±25%	100	0.01	2000
FBHE0805-221-202R	220±25%	100	0.01	2000
FBHE0805-601-202R	600±25%	100	0.01	2000
FBHE0805-300-102R	300±25%	100	0.02	1000
FBHE0805-471-102R	470±25%	100	0.02	1000
FBHE0805-601-102R	600±25%	100	0.02	1000

Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

Typical Electrical Characteristics:

