Chip Ferrite Bead High Current Type
Size 0603





Dimensions: [mm]


Land Pattern: [mm]


Electrical Properties:


Typical Electrical Characteristics:

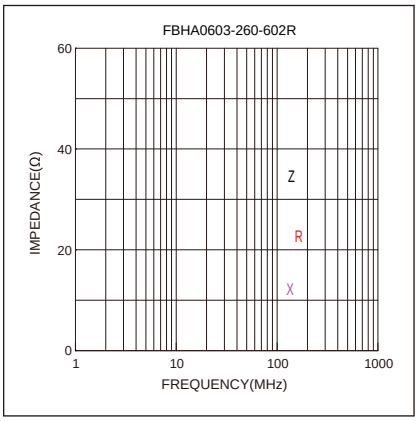


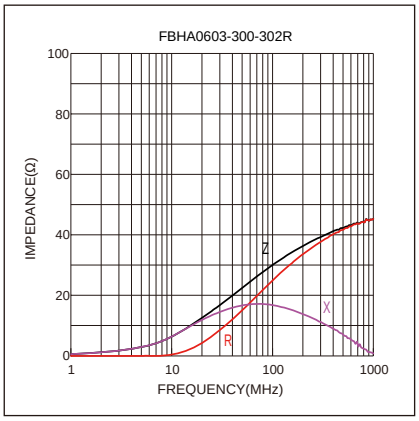


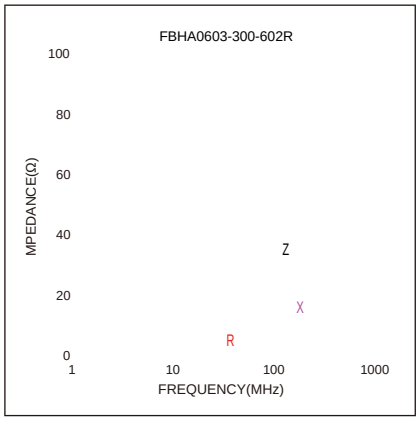


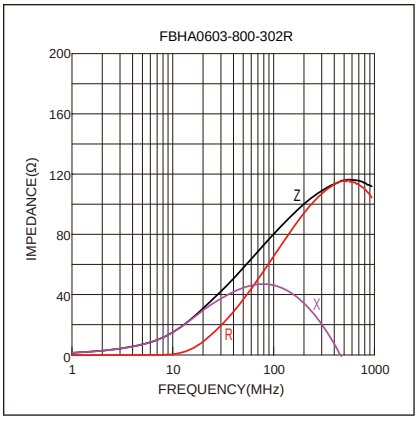


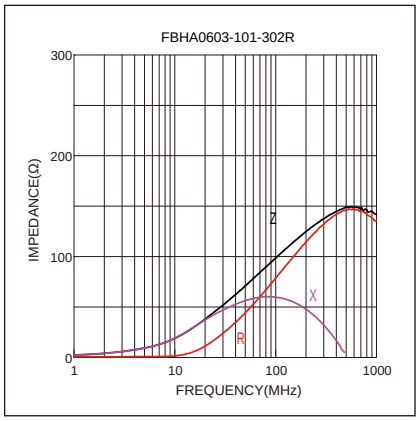


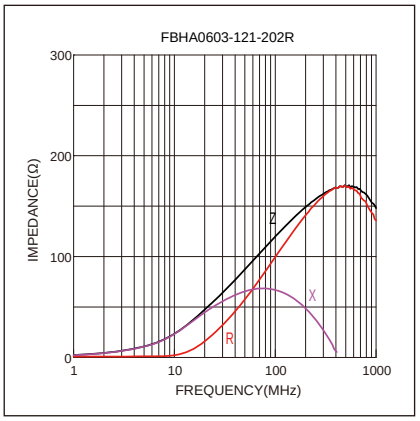


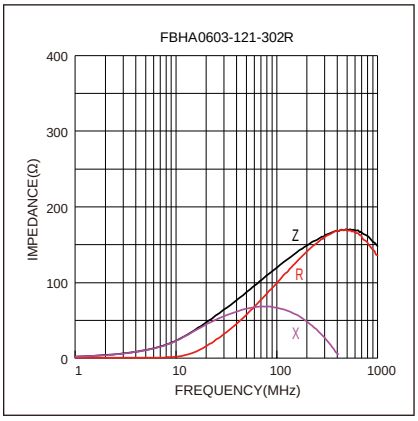


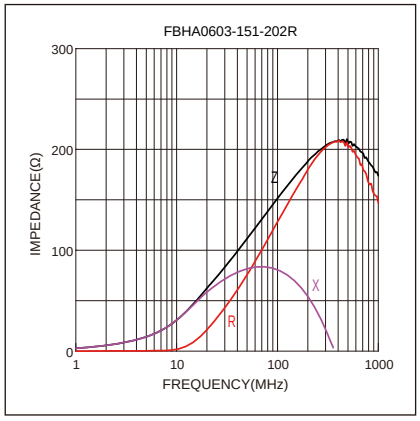


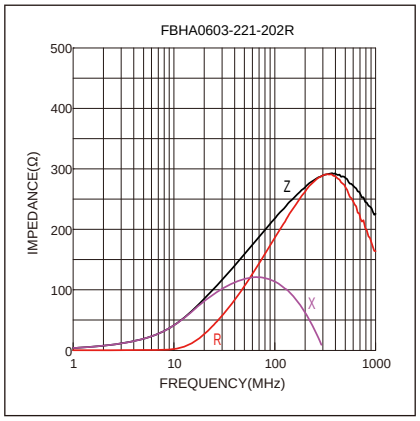


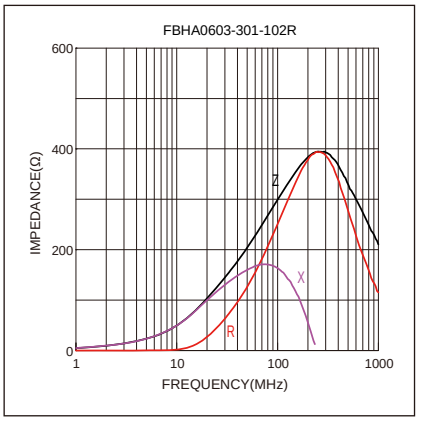

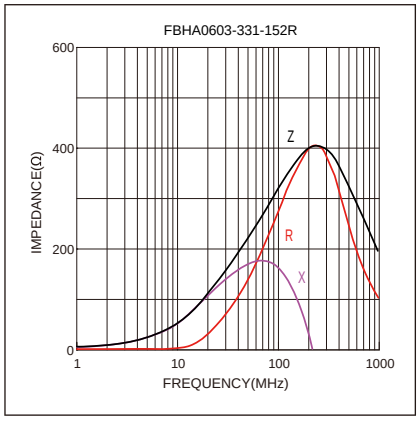


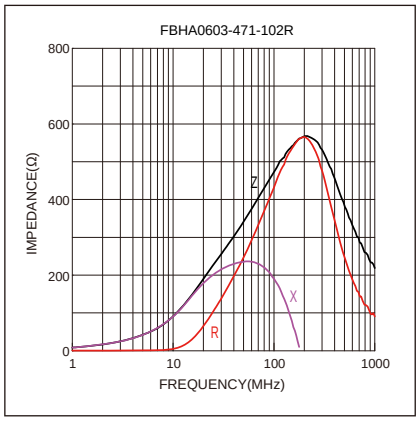

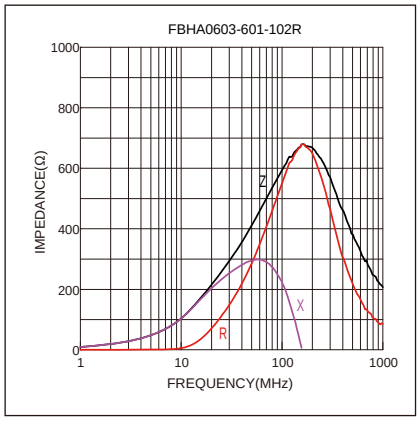
FBHA0603-601-102R
IMPEDANCE(Ω)
1000
800
600
400
200
0
1
10
100
1000
FREQUENCY(MHz)
Z
X
R

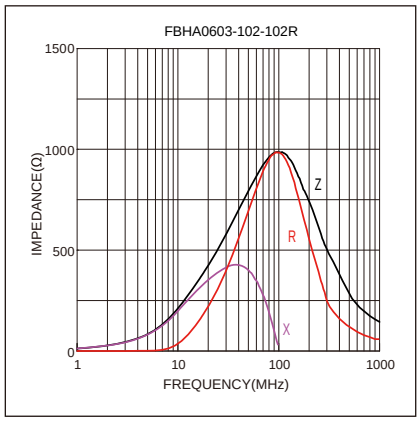
FBHA0603-102-102R
IMPEDANCE(Ω)
1500
1000
500
0
1
10
100
1000
FREQUENCY(MHz)
Z
R
X

Soldering Reflow:

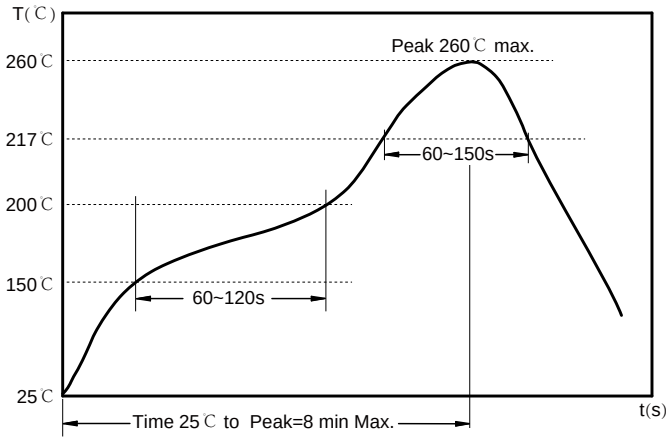

Preheat condition: 150 ~200℃/ 60~120 sec.


Allowed time above 217℃: 60~150 sec.

Max temperature: 260℃.

Allowed Reflow time: 3x max.


Packaging Information:

Tape Dimension:

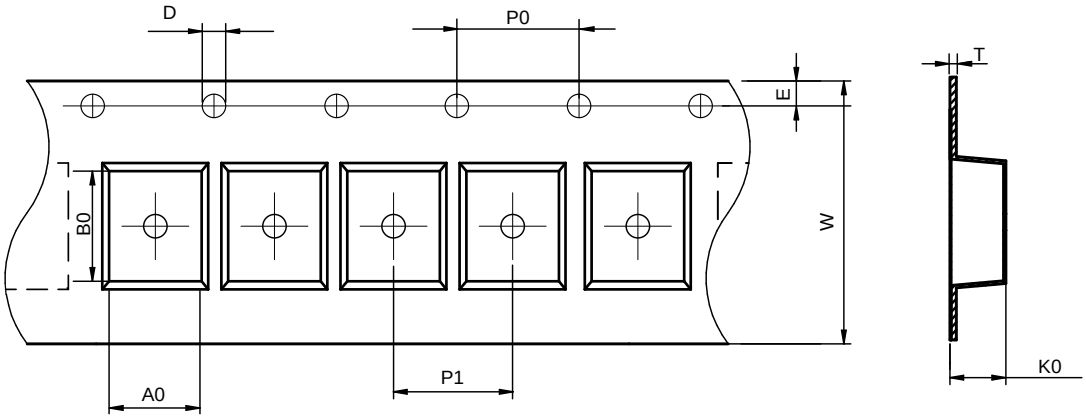


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
FBHA0603	0.96 ± 0.05	1.80 ± 0.05	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	8.0 ± 0.3	0.95 ± 0.05	1.75 ± 0.1	0.95 ± 0.05

Peel force of top cover tape:

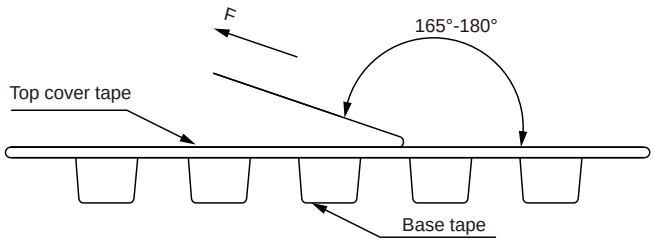


The peel force of top cover tape shall be between 0.14 to 0.58 N

Reel Dimension：[mm]

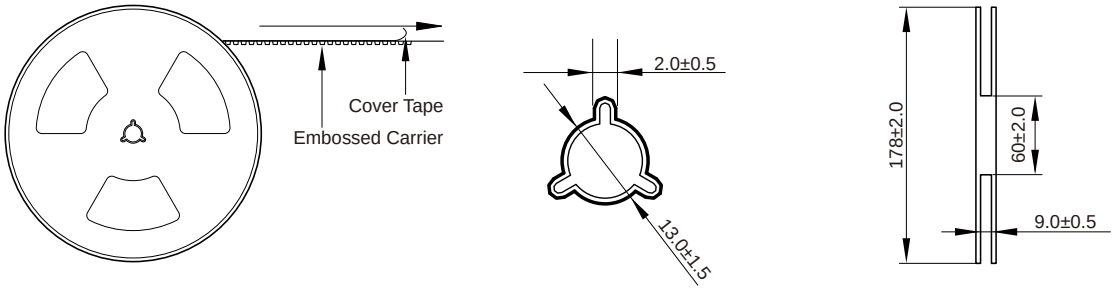

Packaging Quantity:

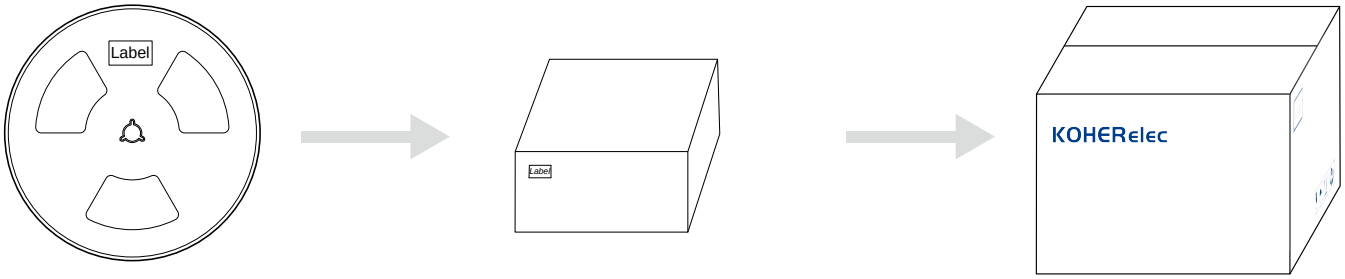

4000 Pcs/Reel

5 Reel /Inner box(20K Pcs)

8 Inner box/Carton box(160K Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.