NRSA Series

SMD Power Inductors For Automotive
Size 2520B




FEATURES

- Magnetic shield type wound inductor for power circuits using a ferrite magnetic material
- High magnetic shield construction and compatible with high-density mounting.
- Larger current and lower Rdc were achieved by optimizing the ferrite core figure.
- Operating temperature: –55 to +125°C(including self-temperature rise)
- AEC-Q200 qualified
- Quantity: 2000pcs


APPLICATION

- Car navigation, car stereo and car accessories only

Dimensions: [mm]

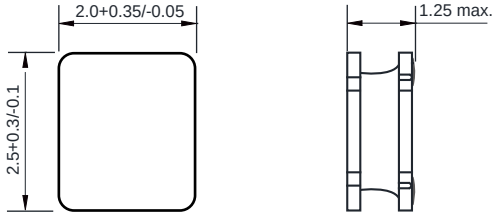

Land Pattern: [mm]

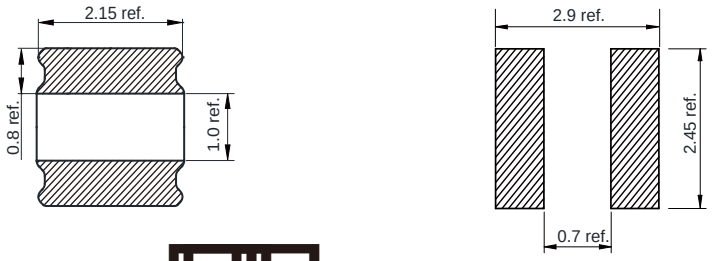


Electrical Properties

	[illegible] (µH)	[illegible]	[illegible] (A)	Saturation (A)	[illegible] (mΩ)
NRSA2520B-R24N	0.24	±30%	3.50	4.05	28
NRSA2520B-R33N	0.33	±30%	3.00	4.00	40
NRSA2520B-R47N	0.47	±30%	2.90	3.60	40
NRSA2520B-R56N	0.56	±30%	2.80	3.30	40
NRSA2520B-R68N	0.68	±30%	2.60	3.28	45
NRSA2520B-1R0M	1.00	±20%	2.40	2.45	60
NRSA2520B-1R5M	1.50	±20%	1.90	2.05	84
NRSA2520B-2R2M	2.20	±20%	1.80	1.90	110
NRSA2520B-3R3M	3.30	±20%	1.40	1.50	155
NRSA2520B-4R7M	4.70	±20%	1.20	1.35	228
NRSA2520B-6R8M	6.80	±20%	0.90	1.00	325
NRSA2520B-100M	10.0	±20%	0.75	0.79	480
NRSA2520B-150M	15.0	±20%	0.55	0.65	625
NRSA2520B-180M	18.0	±20%	0.50	0.55	1000
NRSA2520B-220M	22.0	±20%	0.45	0.50	1020
NRSA2520B-330M	33.0	±20%	0.37	0.38	1400
NRSA2520B-470M	47.0	±20%	0.29	0.30	2000


Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C


KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com


Typical Electrical Characteristics:

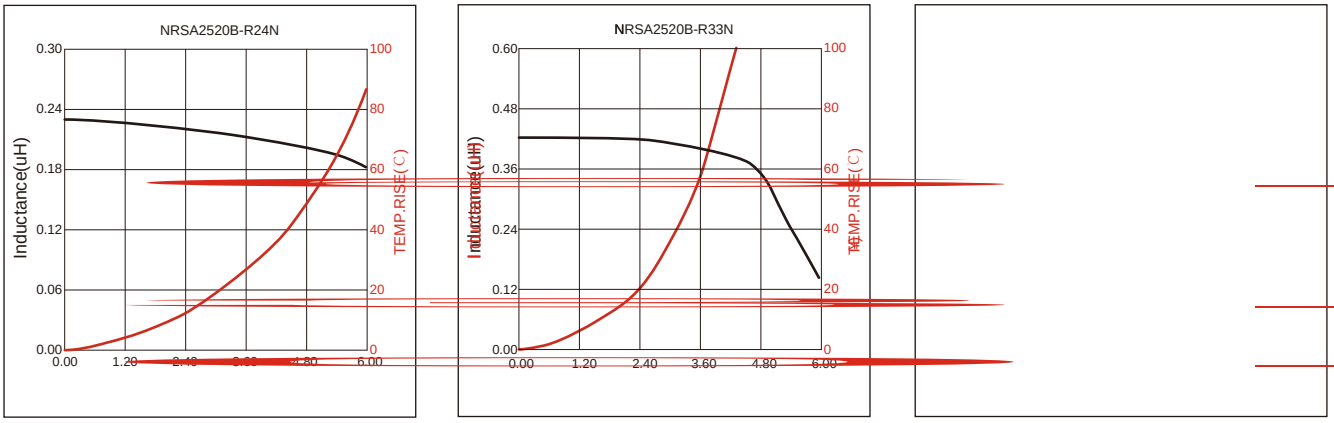


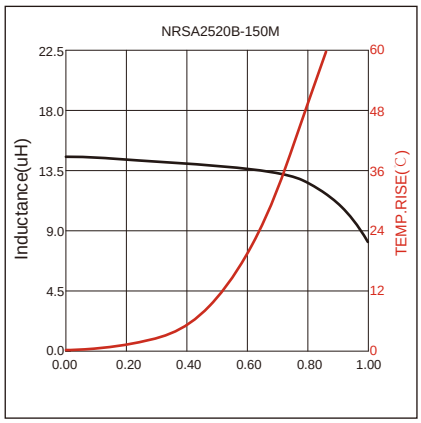



NRSA2520B-150M
Inductance(uH)
TEMP.RISE(℃)
22.5
18.0
13.5
9.0
4.5
0.0
60
48
36
24
12
0
0.00
0.20
0.40
0.60
0.80
1.00

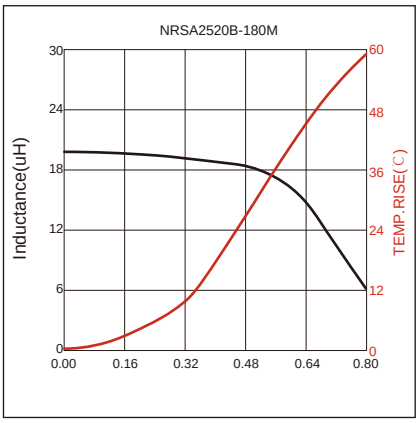
NRSA2520B-180M
Inductance(uH)
TEMP.RISE(℃)
30
24
18
12
6
0
60
48
36
24
12
0
0.00
0.16
0.32
0.48
0.64
0.80

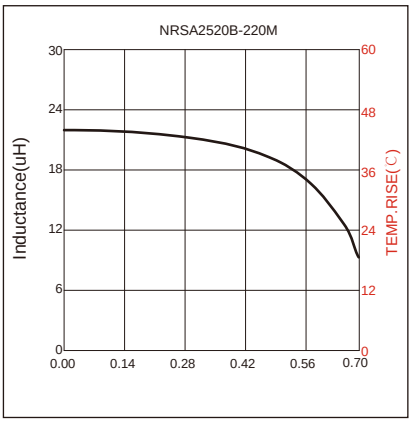
NRSA2520B-220M
Inductance(uH)
TEMP.RISE(℃)
30
24
18
12
6
0
60
48
36
24
12
0
0.00
0.14
0.28
0.42
0.56
0.70

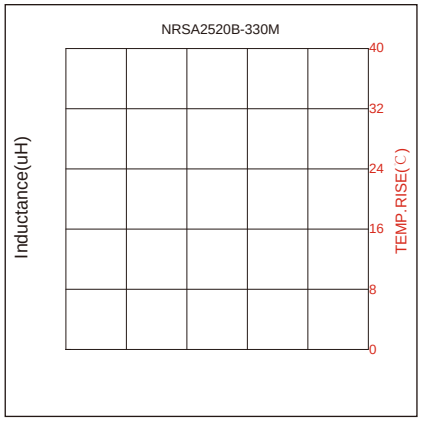

NRSA2520B-330M
Inductance(uH)
TEMP.RISE(℃)
40
32
24
16
8
0

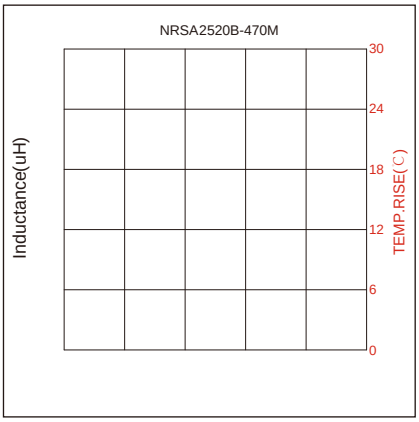
NRSA2520B-470M
Inductance(uH)
TEMP.RISE(℃)
30
24
18
12
6
0

Soldering Reflow:


Packaging Information:

Tape Dimension:

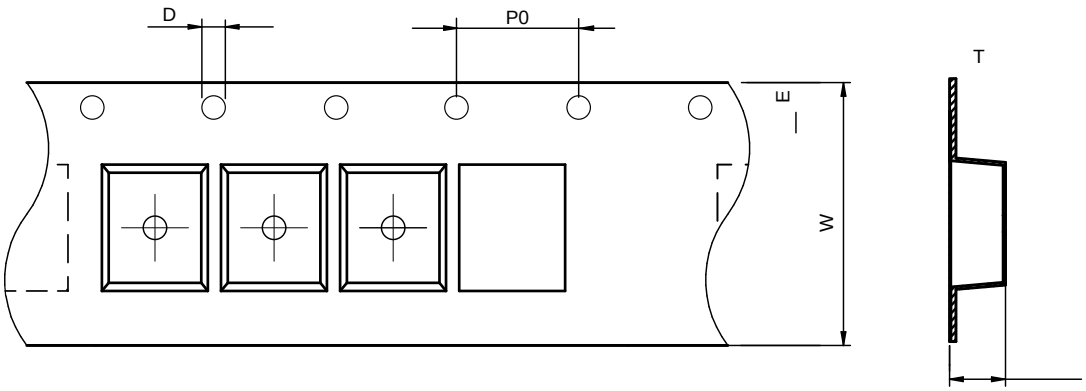


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
NRSA2520B	2.4±0.1	3.0±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.1	1.4±0.1	1.75±0.1	0.20±0.05

Peel force of top cover tape:

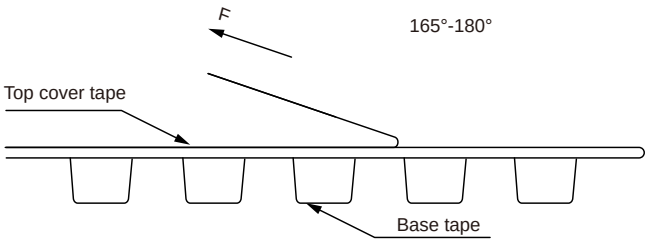


The peel force of top cover tape shall be between 0.2 to 0.58 N

Reel Dimension：[mm]

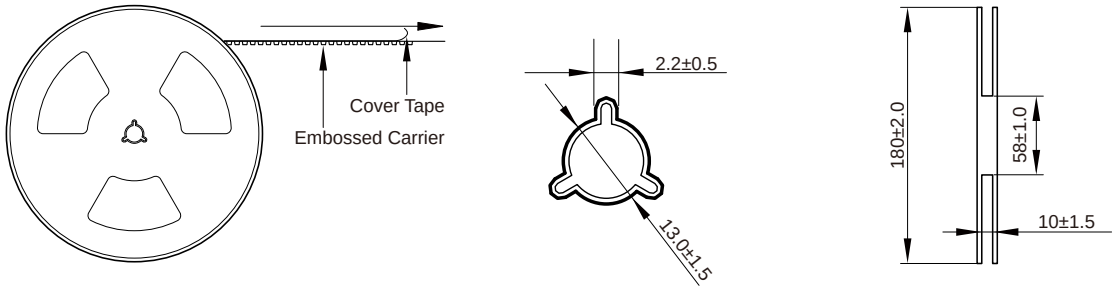

Packaging Quantity:

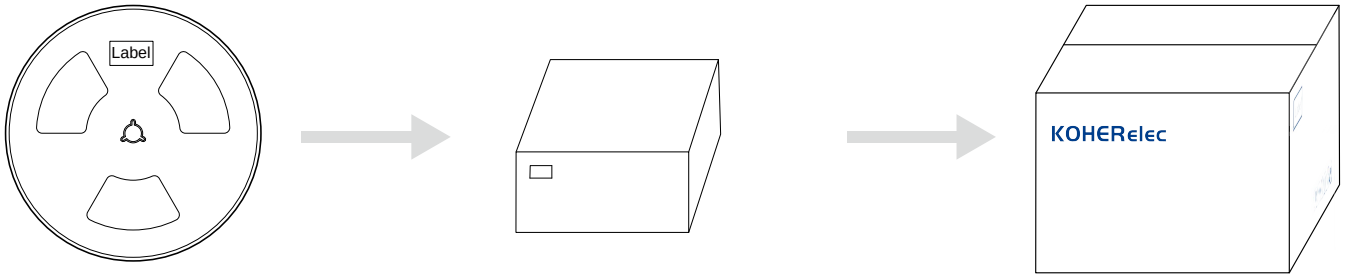

2000 Pcs/Reel

5 Reel /Inner box(10K Pcs)

8 Inner box/Carton box(80K Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.