NRSM Series

Wire Wound SMD Power Inductor

Size 201610




FEATUERS

- Magne c resin for higher current and semi-magne cally shielded
- Opera ng temperature: -40 to +125 °C (including self-temperature rise)
- Quan ty: 2000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

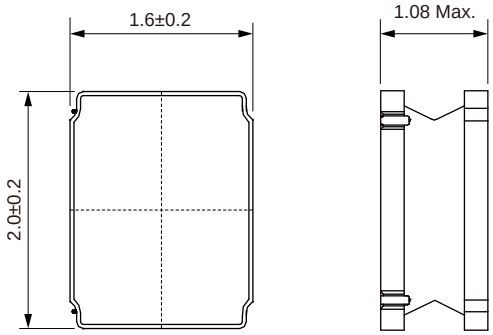

Land Pattern: [mm]



Electrical Properties:


Saturation Current that will cause initial inductance to drop approximately 30%

Temperature Rise Current: For max value,ΔT<40℃; For Typ value,ΔT is approximate 40℃.

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

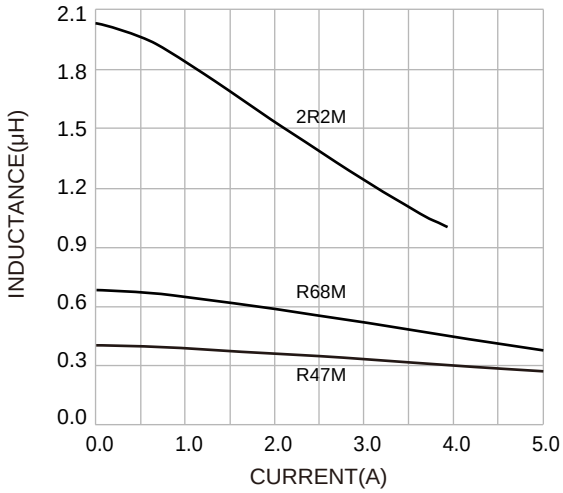

Temperture Rise VS. Current Characteristics:

