# SCM Series





## FEATURES


- Suppression of asymmetrical interference coupled in on lines, whereas data signals up to some MHz can pass una ectedly
- Low profile design makes it op mal for surface moun ng Excellent impedance characteris cs, making it great for suppressing common mode noise.
- Opera ng temperature: -40°C to +85°C
- Quan ty: 1500pcs


## APPLICATION


- CAN bus, FlexRay system

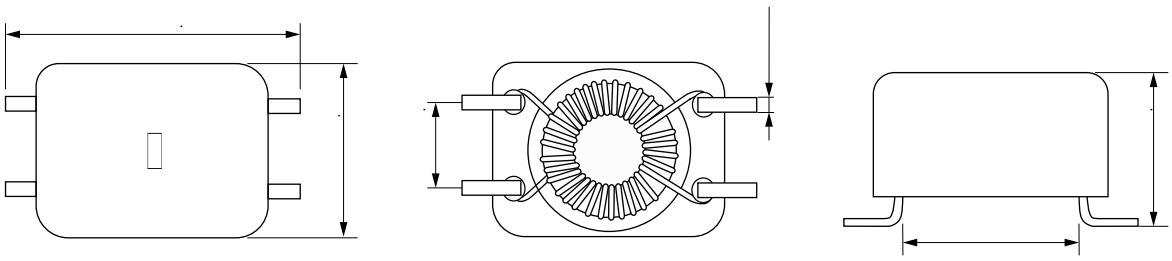




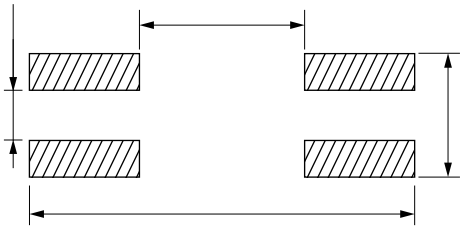


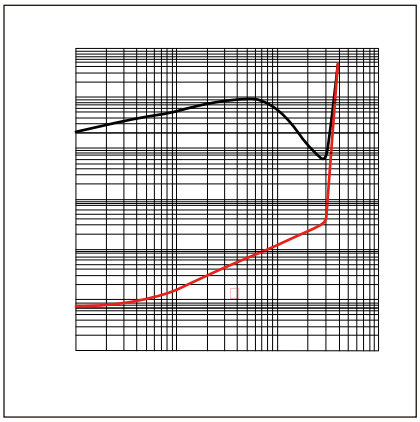

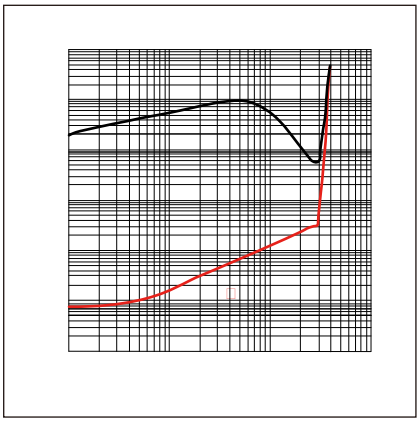

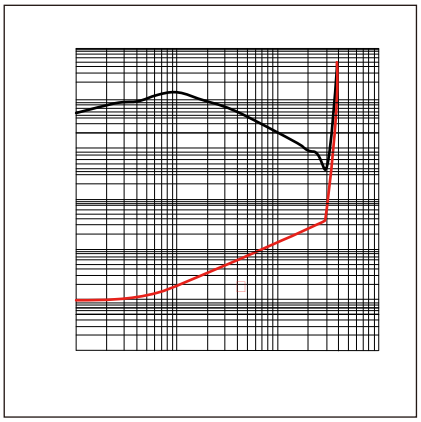

□

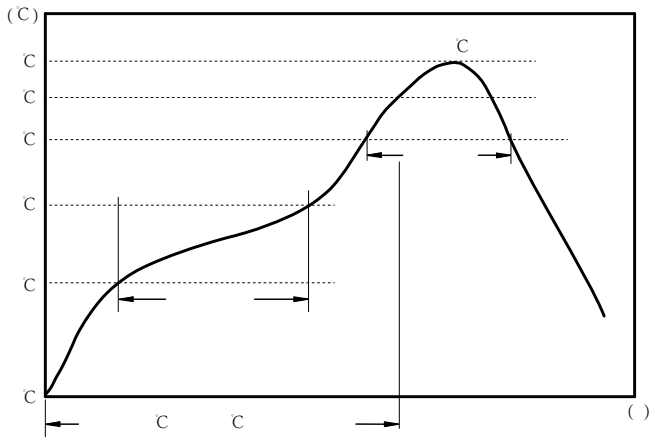


□ C


C

□ □ C

□ □

□


:

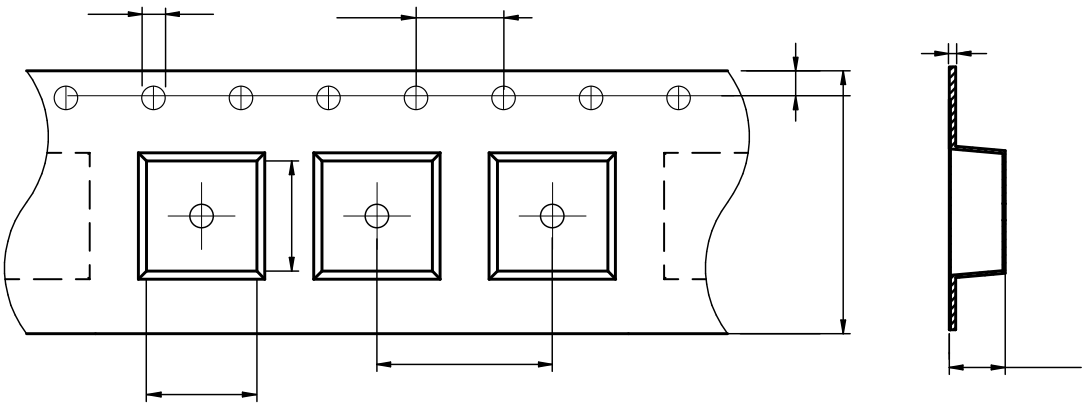

| □ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| SCM9040 | 5.85±0.1 | 9.60±0.1 | 1.5±0.1 | 4.0±0.1 | 8.0±0.1 | 16.0±0.3 | 4.92±0.1 | 1.75±0.1 | 0.50±0.05 |


□ □


| Marking | Printing (Inductance) |
|---|---|

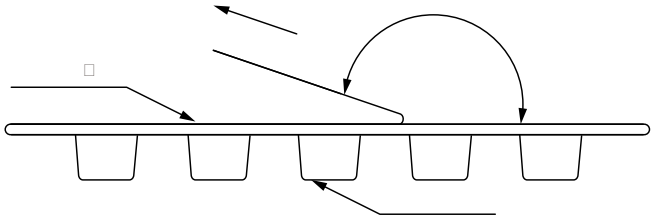

The peel force of top cover tape shall be between 0.1 to 1.17 N

:

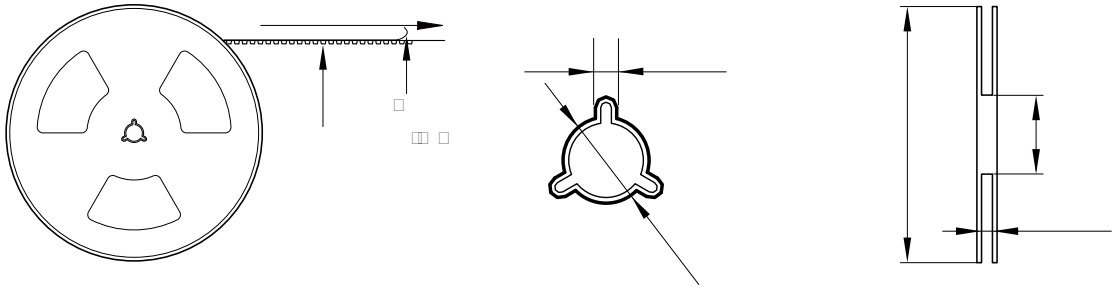

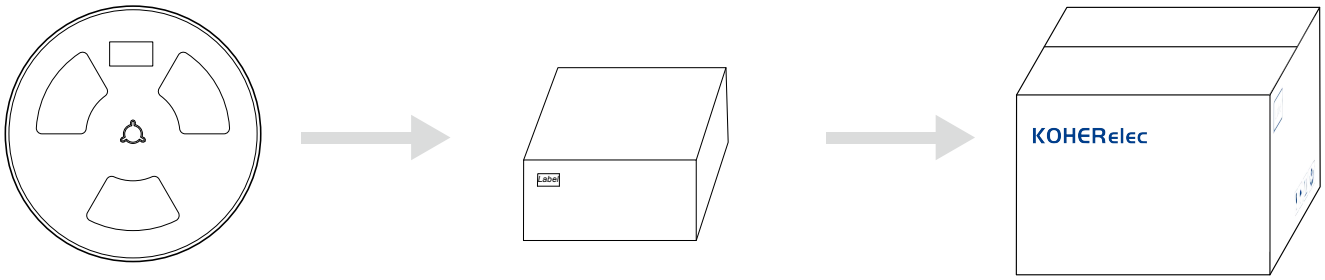


1500 Pcs/Reel

3 Reel /Inner box( 4500 Pcs)

3 Inner box/Carton box( 13.5K Pcs)

# □

## □ :

- □ □ □