WIS Series

Wound Chip Inductor

Size 1210


CHARACTERISTICS

- Small size and higer inductance available
- Small tolerance available
- V dz I·Y ə ü è Y мллл LJ Ǒ ă


APPLICATION

- Filter
- DŜySŜ N I·f Ǒ N Ǒ dz ĺ ű I·LJLJf ĺ Ǒ I·ə ƨ Y

Dimensions: [mm]

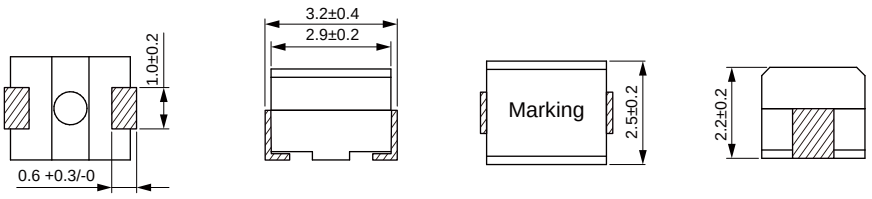

Land Pattern: [mm]



Electrical Properties:

² L{мнмлпwмнY	л◊мн	Бм£	ол	25.2	утр	л◊нн	прл
² L{мнмлпwмрY	л◊мр	Бм£	ол	25.2	усл	л◊нр	прл
² L{мнмлпwмуY	л◊му	Бм£	ол	25.2	сур	л◊ну	прл
² L{мнмлпwннY	л◊нн	Бм£	ол	25.2	рсл	л◊он	прл
² L{мнмлпwнтY	л◊нт	Бм£	ол	25.2	525	л◊ос	прл
² L{мнмлпwооY	л◊оо	Бм£	ол	25.2	рнл	л◊п	прл
² L{мнмлпwофY	л◊оф	Бм£	ол	25.2	птл	л◊пр	прл
² L{мнмлпwптY	л◊пт	Бм£	ол	25.2	пол	л◊р	прл
² L{мнмлпwрсY	л◊рс	Бм£	ол	25.2	395	л◊рр	прл
² L{мнмлпwсуY	л◊су	Бм£	ол	25.2	отл	л◊с	прл
² L{мнмлпwунY	л◊ун	Бм£	ол	25.2	омл	л◊ср	прл
² L{мнмлпмwлY	м◊л	Бм£	ол	7.96	295	л◊т	плл
² L{мнмлпмwнY	м◊н	Бм£	ол	7.96	255	л◊тр	офл
² L{мнмлпмwрY	м◊р	Бм£	ол	7.96	мсл	л◊ур	отл
² L{мнмлпмwуY	м◊у	Бм£	ол	7.96	мнр	л◊ф	орл

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


² L{мнмлπнwнY	2.2	ƃмƒ̂	ол	7.96	млл	м⌽л	онл
² L{мнмлπнwтY	2.7	ƃмƒ̂	ол	7.96	65	м⌽м	нфл
² L{мнмлπowоY	3.3	ƃмƒ̂	ол	7.96	55	м⌽н	нсл
² L{мнмлπowфY	3.9	ƃмƒ̂	ол	7.96	рл	м⌽о	нрл
² L{мнмлππwтY	п⌽т	ƃмƒ̂	ол	7.96	пр	м⌽р	ннл
² L{мнмлπрwсY	5.6	ƃмƒ̂	ол	7.96	пл	м⌽с	нлл
² L{мнмлπсwуY	с⌽у	ƃмƒ̂	ол	7.96	35	м⌽у	мул
² L{мнмлπуwнY	у⌽н	ƃмƒ̂	ол	7.96	ол	н⌽л	мтл
² L{мнмлππллY	мл	ƃмƒ̂	ол	2.52	ол	н⌽м	мрл
² L{мнмлππнлY	мн	ƃмƒ̂	ол	2.52	ну	2.5	мпл
² L{мнмлππрлY	мр	ƃмƒ̂	ол	2.52	25	н⌽у	мол
² L{мнмлππулY	му	ƃмƒ̂	ол	2.52	22	3.3	мнл
² L{мнмлππннлY	22	ƃмƒ̂	ол	2.52	мф	3.7	ммл
² L{мнмлππнтлY	27	ƃмƒ̂	ол	2.52	му	р⌽л	ул
² L{мнмлππоолY	33	ƃмƒ̂	ол	2.52	мт	5.6	тл
² L{мнмлππофлY	39	ƃмƒ̂	ол	2.52	мр	с⌽п	65
² L{мнмлππптлY	пт	ƃмƒ̂	ол	2.52	мп	т⌽л	сл
² L{мнмлππрслY	56	ƃмƒ̂	ол	2.52	мо	у⌽л	55
² L{мнмлππсулY	су	ƃмƒ̂	ол	2.52	мм	ф⌽л	рл
² L{мнмлππунлY	ун	ƃмƒ̂	ол	2.52	мл	мл⌽л	пр
² L{мнмлππмлмY	млл	ƃмƒ̂	нл	л⌽тфс	9	мм⌽л	пл
² L{мнмлππмнмY	мнл	ƃмƒ̂	нл	л⌽тфс	у	мм⌽л	тл
² L{мнмлππмрмY	мрл	ƃмƒ̂	нл	л⌽тфс	7	мр⌽л	65

hLJŜ№I·əyƎ ŭŜYˈLJŜ№I·údz№Ŝ Y ππл ˚C ŭƨ Ьмнр˚C


¢ŜYˈLJŜ№I·údz№Ŝ №ăŜ Ödz№№Syŭ úKŜ I·Ŏŭdz I·f ØI·fdzŜ ƨ₮ 5 / ÖdzN№Syŭ ǿKŜyˈúKŜ ŭŜYˈLJŜ№I·údz№Ŝ №ăŜ ƛă ɲ¢нл ˚C

Typical Electrical Characteristics:

Temperture Rise VS. Current Characteristics:

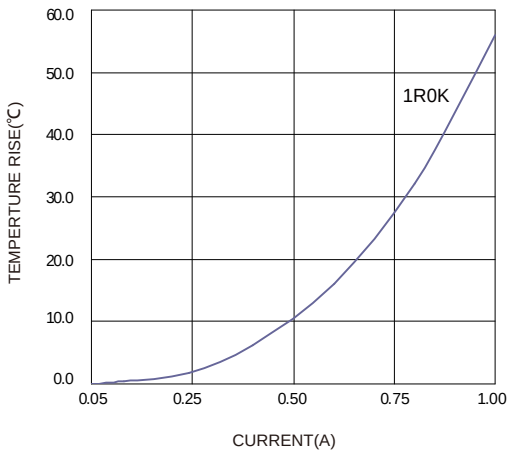


Impedance VS. Frequency Characteristics:

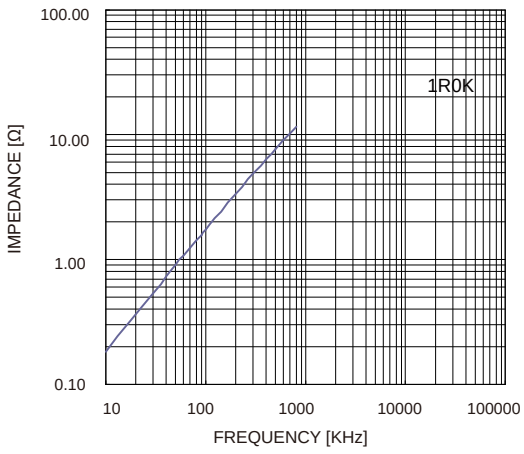


KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


Temperture Rise VS. Current Characteristics:

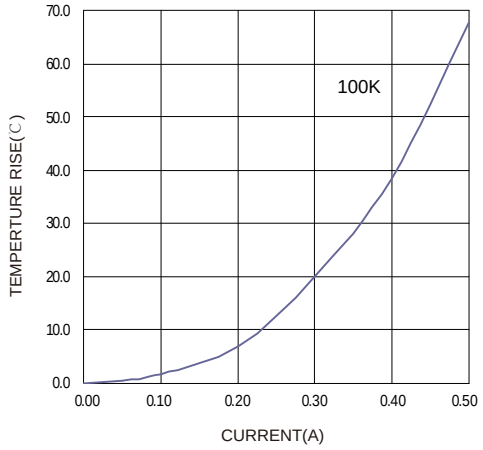

Impedance VS. Frequency Characteristics:

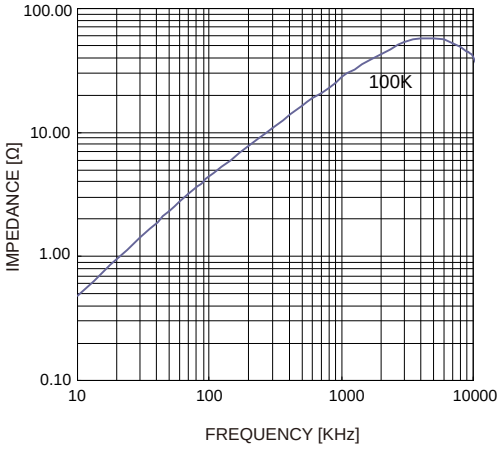

Temperture Rise VS. Current Characteristics:

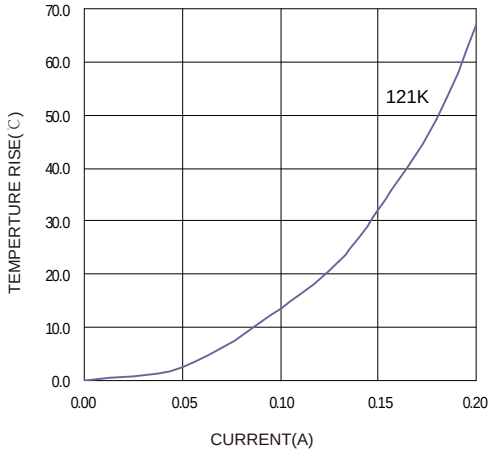

Impedance VS. Frequency Characteristics:

